arXiv:1204.4559v2 [q-bio.NC] 16 Jan 2013

Violation of the Leggett-Garg inequality in cognitive processes

F T Arecchi12, **A Farini**1 **and N Megna**1
1 Istituto Nazionale di Ottica-CNR, Largo Fermi 6, 50125, Firenze Italy
2Università di Firenze, Firenze Italy

E-mail: `tito.arecchi@ino.it`

Abstract. The Leggett and Garg Inequality (LGI) is a test of the classical behaviour of an observed system, in the case of a single measurement channel monitored at different times. Here we report LGI violation in cognitive tasks consisting in the identification of mutually incompatible binary words with negligible semantic content; the violation is maximal at an inter-measurement time τ_{LG} around 2 sec with inter-subject differences. This time is close to, but consistently lower than, the characteristic times associated with other, semantically rich, linguistic endeavors. The LGI violation persists over a time window of 1 sec around τ_{LG}; outside this window LGI is recovered. The universal occurrence of τ_{LG} in linguistic transactions suggests that a quantum dynamics might speed up the search in a semantic space. Implementing such a search in terms of synchronization of neural spikes and considering the associated quantum aspects, we evaluate a decoherence time very close to τ_{LG}.

PACS numbers: 03.65.Ta 42.66.Si

1. Introduction

A Bell-type experiment consists of the comparison of data collected simultaneously in different locations[1]. Leggett and Garg[2] have introduced an equivalent time dependent inequality (Leggett Garg Inequality LGI) in the case of a single measurement channel monitored at different times. Several violations of LGI in microscopic physics have been recently reported[3, 4, 5]. LGI is based on two assumptions, both necessary, namely, macrorealism and non-invasive measurement (NIM). In cognitive tasks, there are instances where NIM is not a valid assumption; in such cases one should expect LGI violation. Here we report LGI violation in cognitive tasks consisting in the identification of mutually incompatible words with negligible semantic content; the violation is maximal at an inter-stimulus time τ_{LG} close to, but consistently lower than, the characteristic times associated with other, semantically rich, linguistic endeavors. The LGI violation persists over a time window of 1 sec around τ_{LG}; outside this window NIM holds.

There are two different human cognitive tasks occurring on different times, namely,

i) *apprehension*, whereby an incoming sensorial stimulus (bottom up) combined with a memorized (top down) interpretation yields a coherent perception, that manifests itself in a motor reaction or in a linguistic utterance; an apprehension requires a time from a few hundred millisec up to around one sec;

ii)*judgment*, whereby a piece of a linguistic text (literary, musical, or figurative) is compared with a previous one in order to infer a comparison; a judgment requires a time around 3 sec.

The apprehension is common to humans and other animal species; it is intensively investigated in search of the so-called NCC (neural correlates of consciousness) [6, 7]. Apprehension is associated with synchronizations of the gamma band neuronal oscillations in distant cortical areas [8, 9, 10].

Without entering the neuronal details, apprehension can be visualized at a global level, in terms of a Bayes formula, whereby the bottom up stimuli represent the incoming data, and the top down neural perturbations represent the interpretative model. In presence of the sensorial stimuli, one formulates a set of prior hypotheses, and the apprehension results as the posterior hypothesis that drives a motor response. Repeated apprehensions keep this Bayesian structure; a sequence of them is then Markovian, in the sense that a previous apprehension does not affect in a structural way the next one [11, 12].

On the contrary, in the judgment, the most recent piece is strongly affected by the previous one, recalled by the memory. Think for instance of the seventh verse of a poem that acquires a meaning as it is compared with the sixth verse; the same can be said for two successive measures of a musical composition. Judgment entails a developed language.

Apprehensions and judgments have been associated, respectively, with a Bayes inference and with an inverse Bayes inference [13, 14]. These last references discuss also the two associated times, namely, around 1 sec for apprehension [6, 7, 8] and around 3 sec for judgments. The 3 sec intervals in the judgment operations had been suggested by the extensive analyses of this cognitive time provided by Ernst Poeppel [15, 16, 17, 18].

At variance with the apprehension, the judgment is strongly contextual; this suggests that judgments should violate the LGI.

The question of quantum aspects in cognitive endeavours has already been faced with reference to words of the current language [19, 20]. Very recently, the failure of the Bayesian approach to account for order effects in inference and the consequent resorting to a quantum probability account has been addressed [21]. However, these approaches depend heavily on strong assumptions on the semantic values of the chosen words.

2. Results

To avoid any semantic bias, we rely on the most elementary lexicon, namely, a sequence of binary words with negligible semantic flavour. Precisely, we expose fourteen normal subjects to a balanced presentation of a Necker cube [22, 23], a wire frame cube with no depth cues, and request to press two different buttons, depending on the cube face perceived as the front one, anytime a short audio signal alerts the subject (fig.1).

The simplest form of the LGI derives from examining a system that has only two possible states, to which we attribute respectively measurement values $Q = \pm 1$. The key here is that we have measurements at two different times, and one or more times between the first and last measurement. The simplest example is where the system is measured at three successive times $t_1 < t_2 < t_3$. For instance, the correlation C_{13} between times t_1 and t_3 for N realizations of the experiment, reads

$$C_{13} = \frac{1}{N}\sum_{r=1}^{N} Q_r(t_1)Q_r(t_3)$$

We define K as $K = C_{12} + C_{23} - C_{13}$. In terms of actual measurements Q's, K is given by

$$K = \frac{1}{N}\sum_{r=0}^{N}(Q(t_1)Q(t_2) + Q(t_2)Q(t_3) - Q(t_1)Q(t_3))$$

For every realization r, the term in the parentheses must be less than or equal to unity, so that the result for the sum is also less than (or equal to) unity. Thus the three time LGI is

$$K \leq 1$$

In the derivation, it has been assumed that the quantity Q, representing the state of the system, always has a definite value (macrorealism per se) and that its measurement at a certain time does not change this value nor its subsequent evolution (noninvasive measurability). A violation of LGI implies that at least one of these two assumptions fails.

In fig.2 we report K versus the inter-stimulus interval (ISI) $t_2 - t_1 = t_3 - t_2$ for fourteen subjects. For each subject, successive presentations of the sequence of fig.1 are

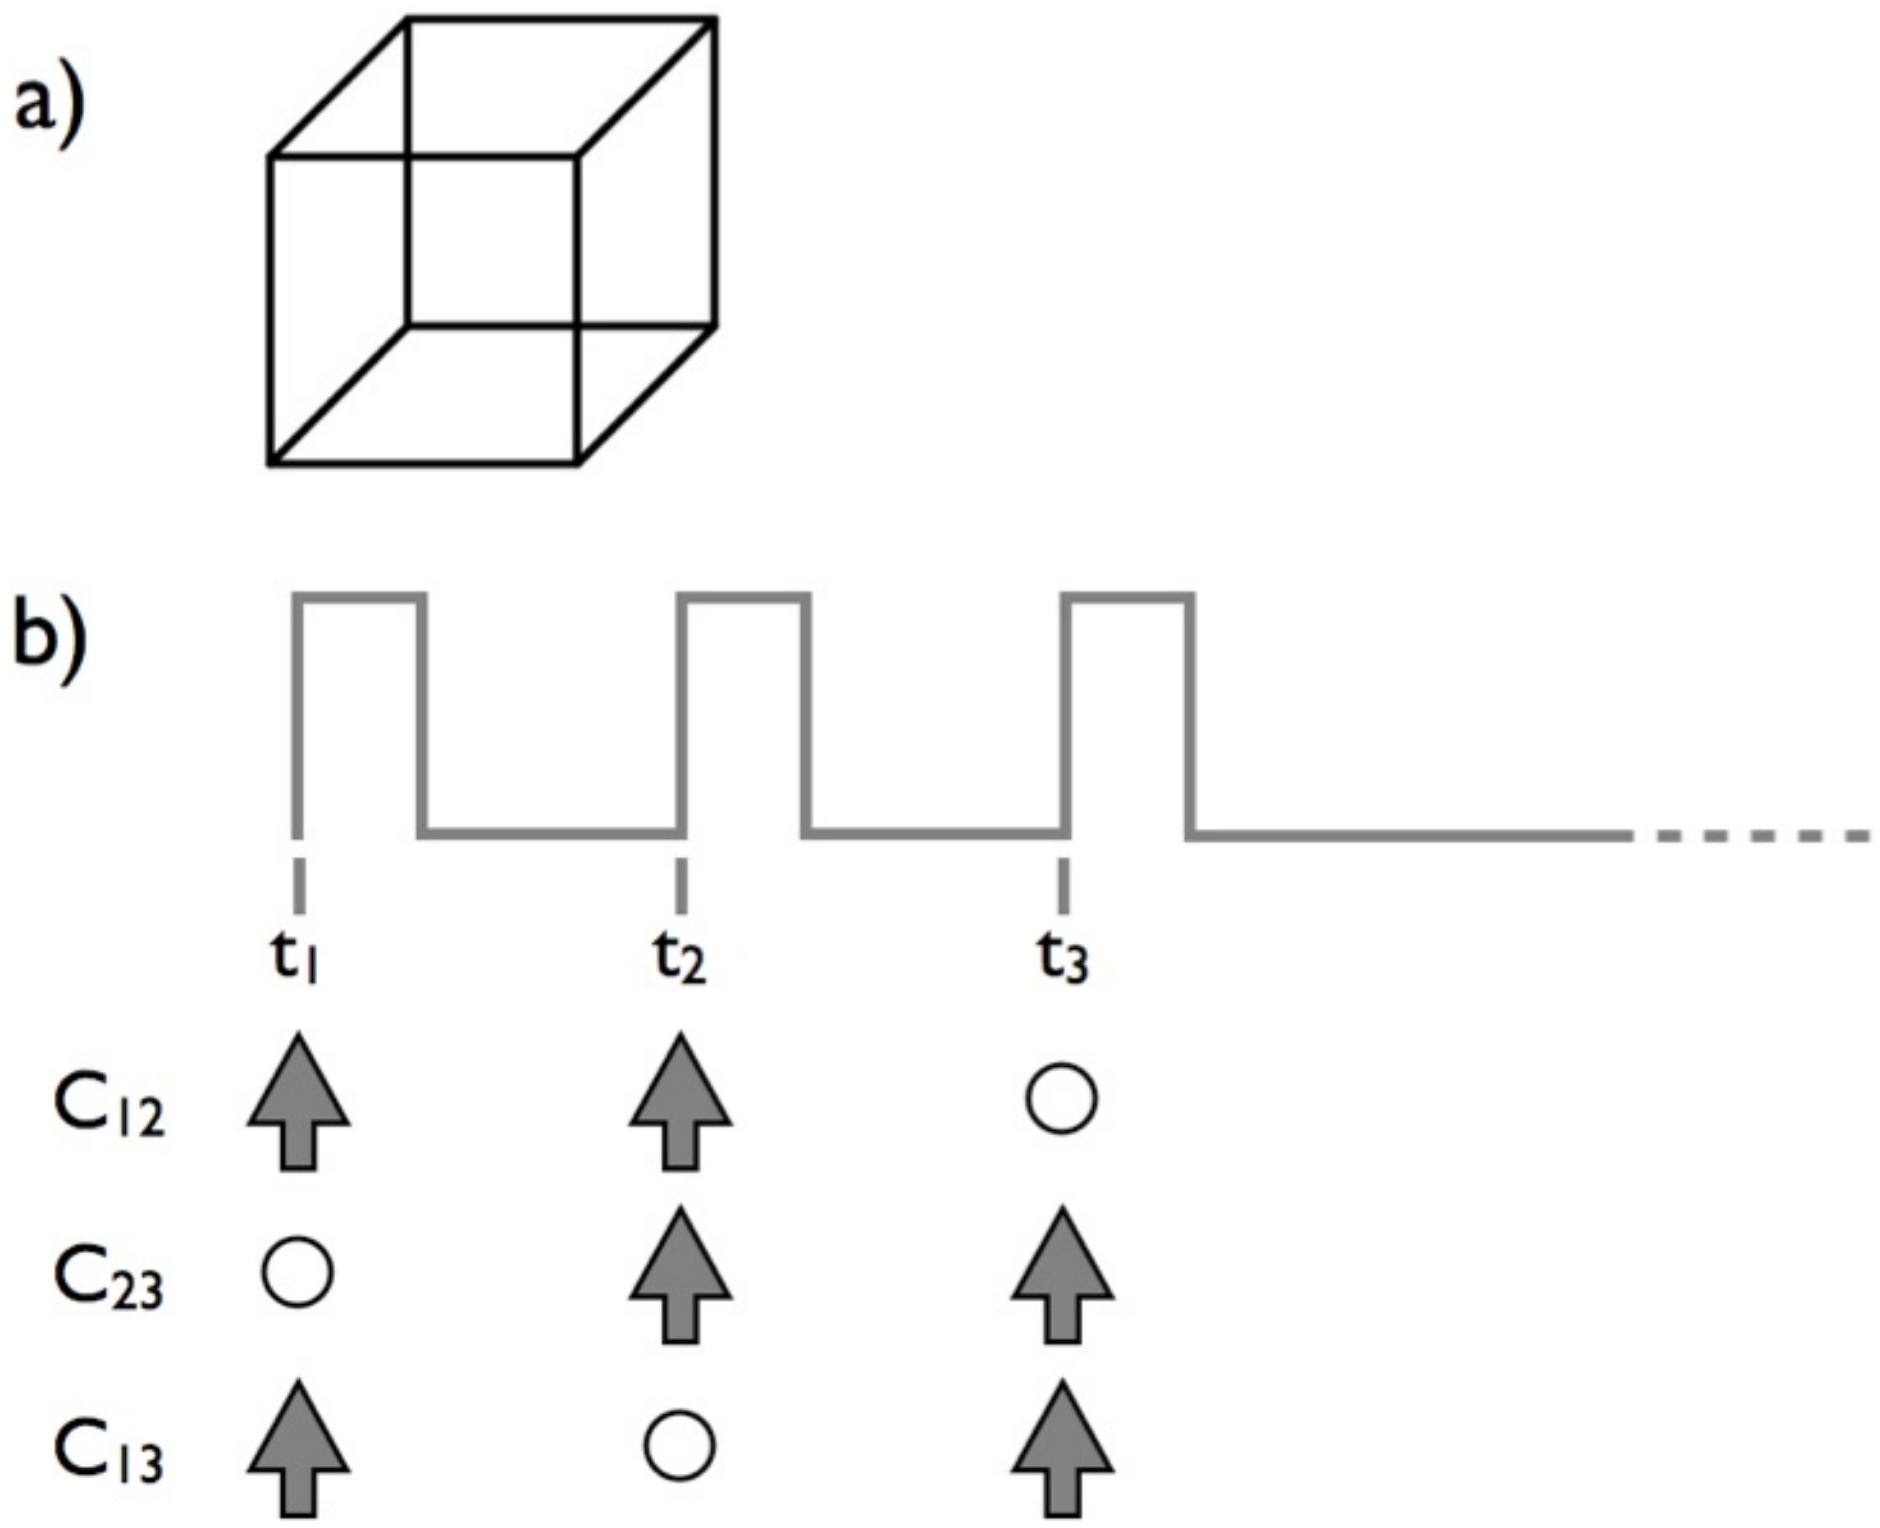

Figure 1. a) The Necker Cube b) Experimental procedure. Sequence of three successive presentations of the Necker cube (represented as square pulses, lasting 0.25 sec each) separated by time intervals $t_2 - t_1 = t_3 - t_2$, adjustable from 1 sec up. The vertical arrows denote a sharp acoustic signal acting as a stimulus that demands the subject to press either button corresponding to the perceived front face of the cube. The circles denote the presentation of the cube in the absence of the acoustic signal. The three sequences correspond to C_{12}, C_{23} and C_{13} respectively. The sequences are repeated after a time much longer than $t_2 - t_1$. The time-sliced presentations of the Necker cube do not really affect the results here presented; in fact even a continuous presentation of the Necker cube provides similar results.

separated by a blank time of 5 sec, well above the maximum ISI explored. In fig.1 the time duration of each cube presentation is 0.25 sec. One might guess that the timing is ruled by the acoustic warning signals (arrows of fig.1) and the flashed presentation of the cube does not matter. In fact, we have tested also with a continuous presentation of the cube; however, in such a case all subjects yield K values consistently below 1 and located between 0.5 and -1.5, without any correlation with the ISI interval. The same result (no violation of LGI) was obtained with another bistable figure, the rotating sphere [24], with continuous presentation. Indeed , if we aim at testing a linguistic performance for a sequence of binary words, the words must be presented sequentially

Due to the fact that every subject could have a different decoherence time we have created a meta-subject response aligning the peaks at a time $t = 0$ and plotting the averaged Ks for negative and positive time separations from the peak τ_{LG} . The violation of LGI is statistically significative at the peak(Fig.3). In Fig 4 we plot the

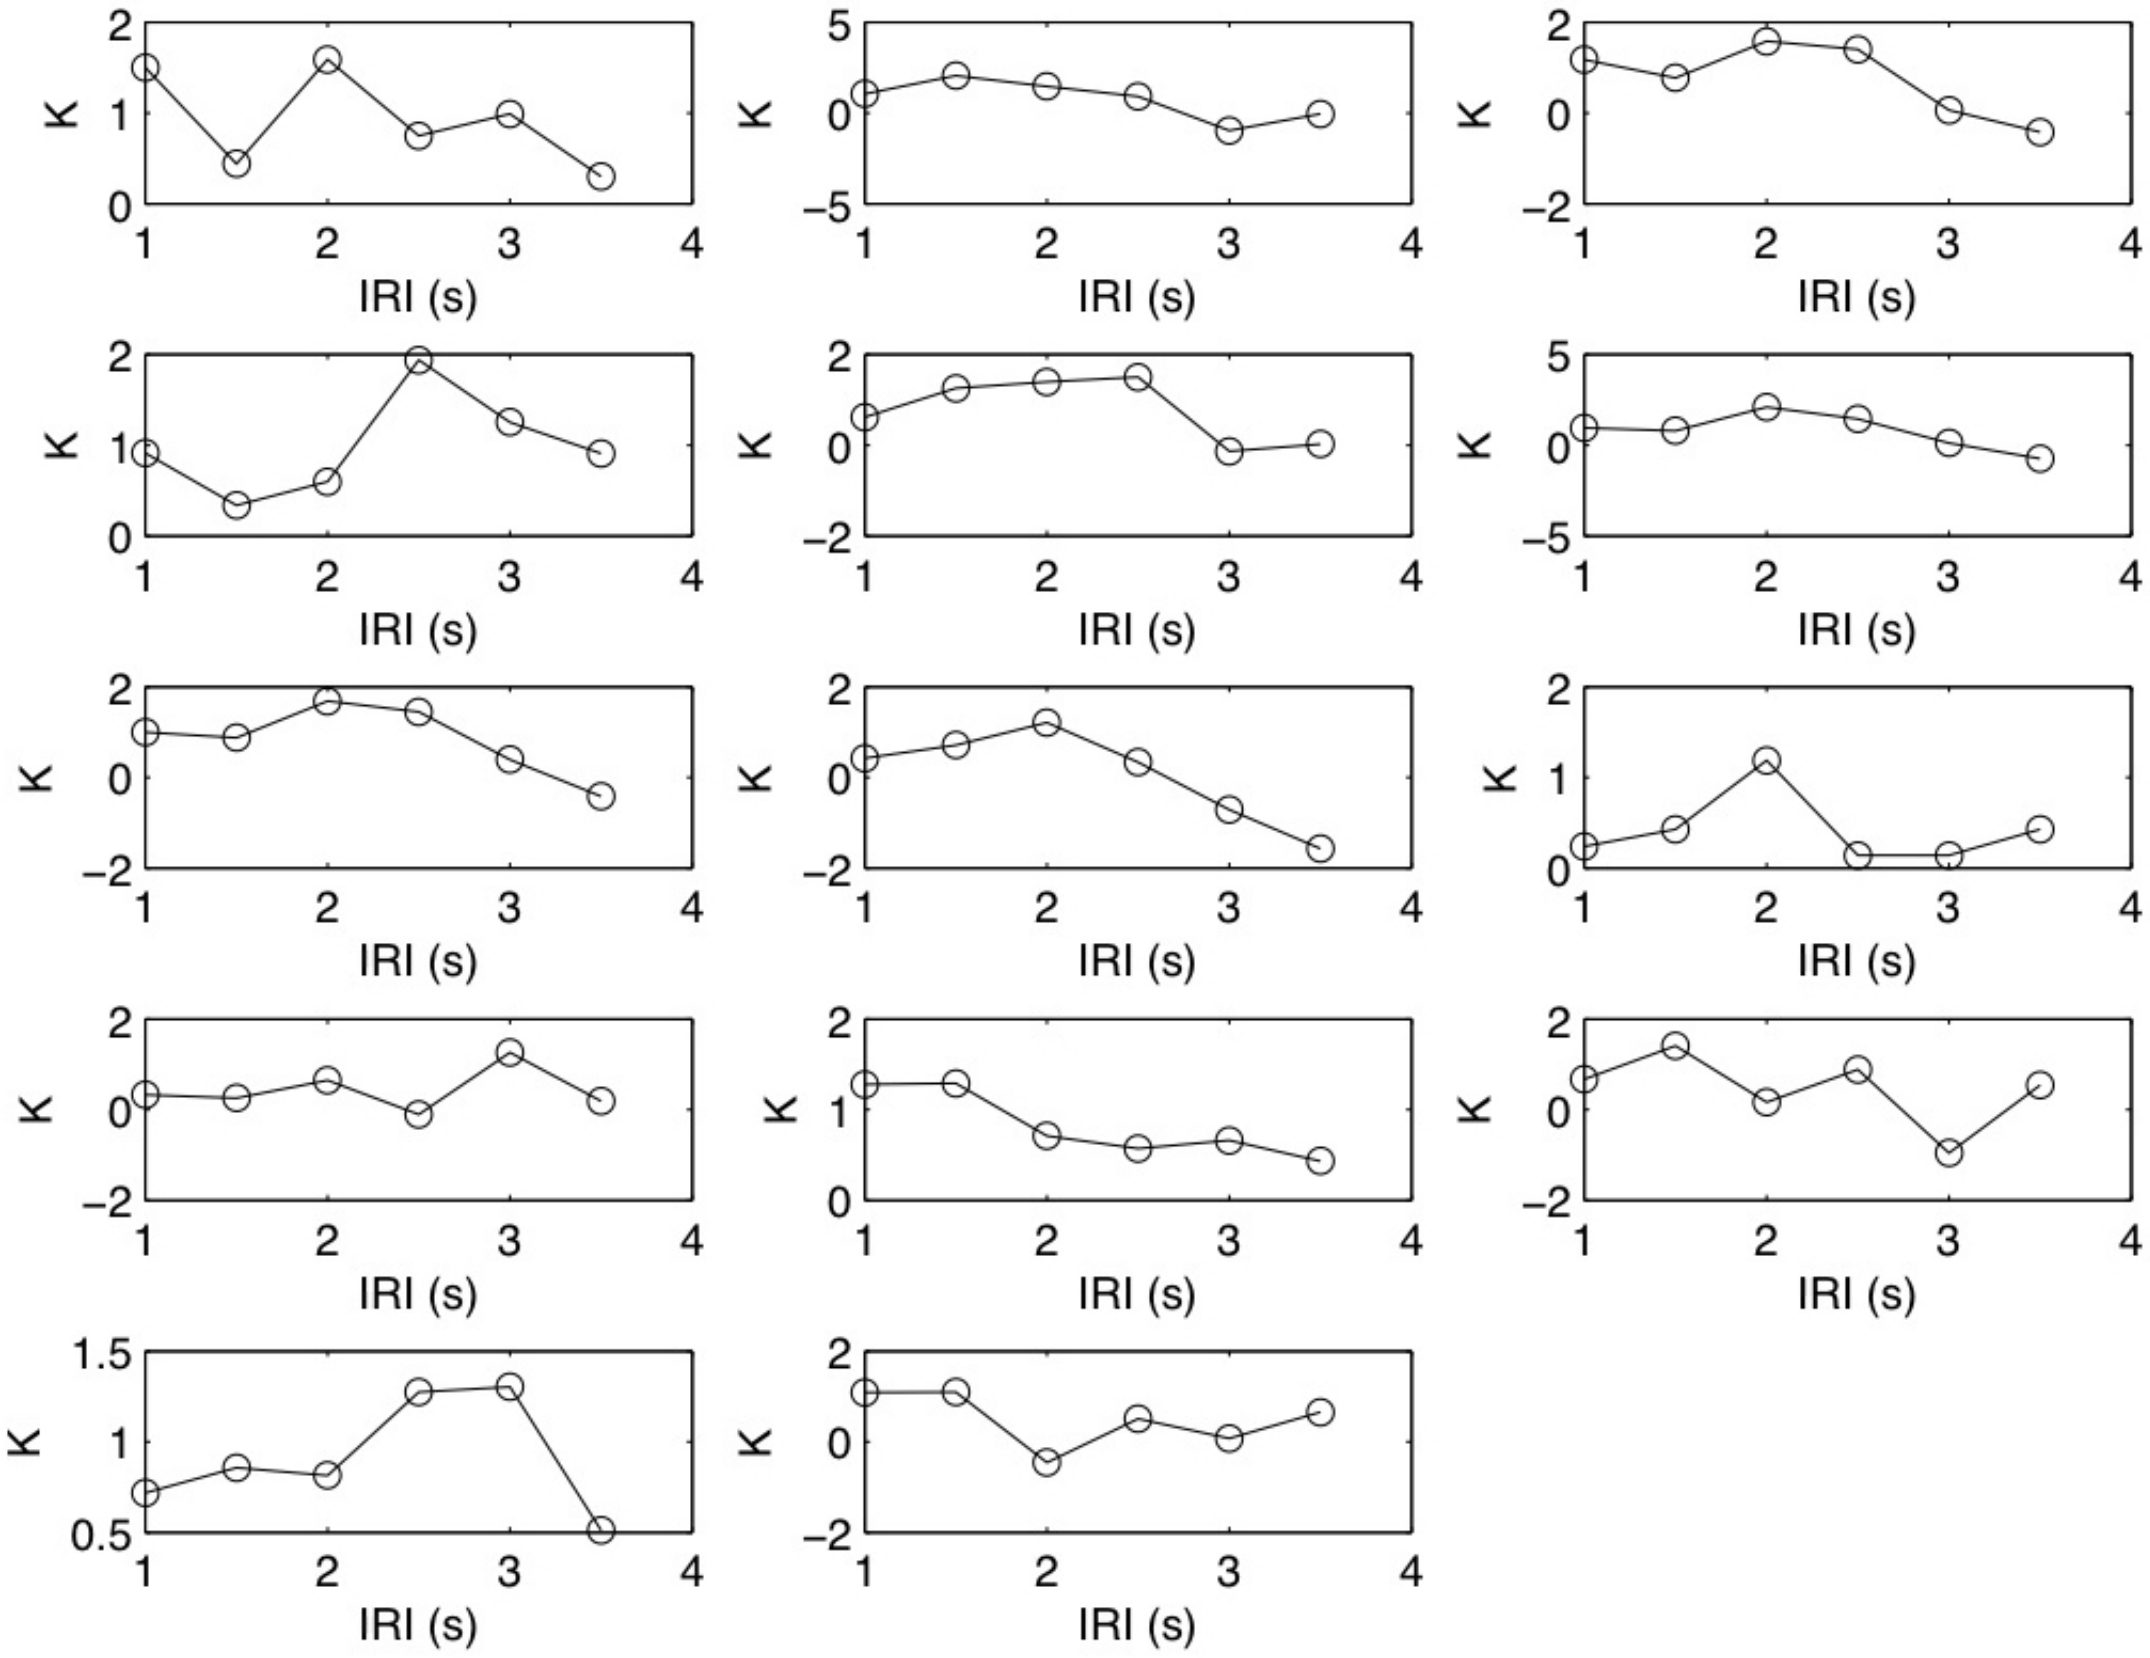

Figure 2. K values corresponding to the six selected interstimulus intervals for each of the fourteen subjects that participated to the experiment. The correlation C_{12} results as a sum of products $Q1 * Q2$, similarly for C_{23} and C_{13} . By these data introduced into Eqs. (1) and (2), we evaluate K for each ISI.

statistical distribution of τ_{LG} for the fourteen subjects.

3. Why τ_{LG}: qualitative explanations and a quantum model

We elaborate on this LGI violation around 2 sec. A very striking new fact is that the peak τ_{LG} of LGI violation is close to the maximal value of the statistical distribution of pauses in several linguistic endeavors, as e.g. the sequence of pauses in declaiming a poem (fig 5a) or performing a musical piece(fig5b).

From the neuroscientific side, no attempt has been made to tackle the sharp discrepancy between apprehension times, for which several NCC have been devised [6] and the judgment times necessary to build meanings out of sequences of consecutive linguistic passages. Besides the reports by Poeppel [15, 16, 17, 18], this issue has been exclusively dealt with by philosophers, without reaching a common consensus (see e.g.[25, 26]).

Let us speculate about the time location τ_{LG} of the maximal LGI violation. We here

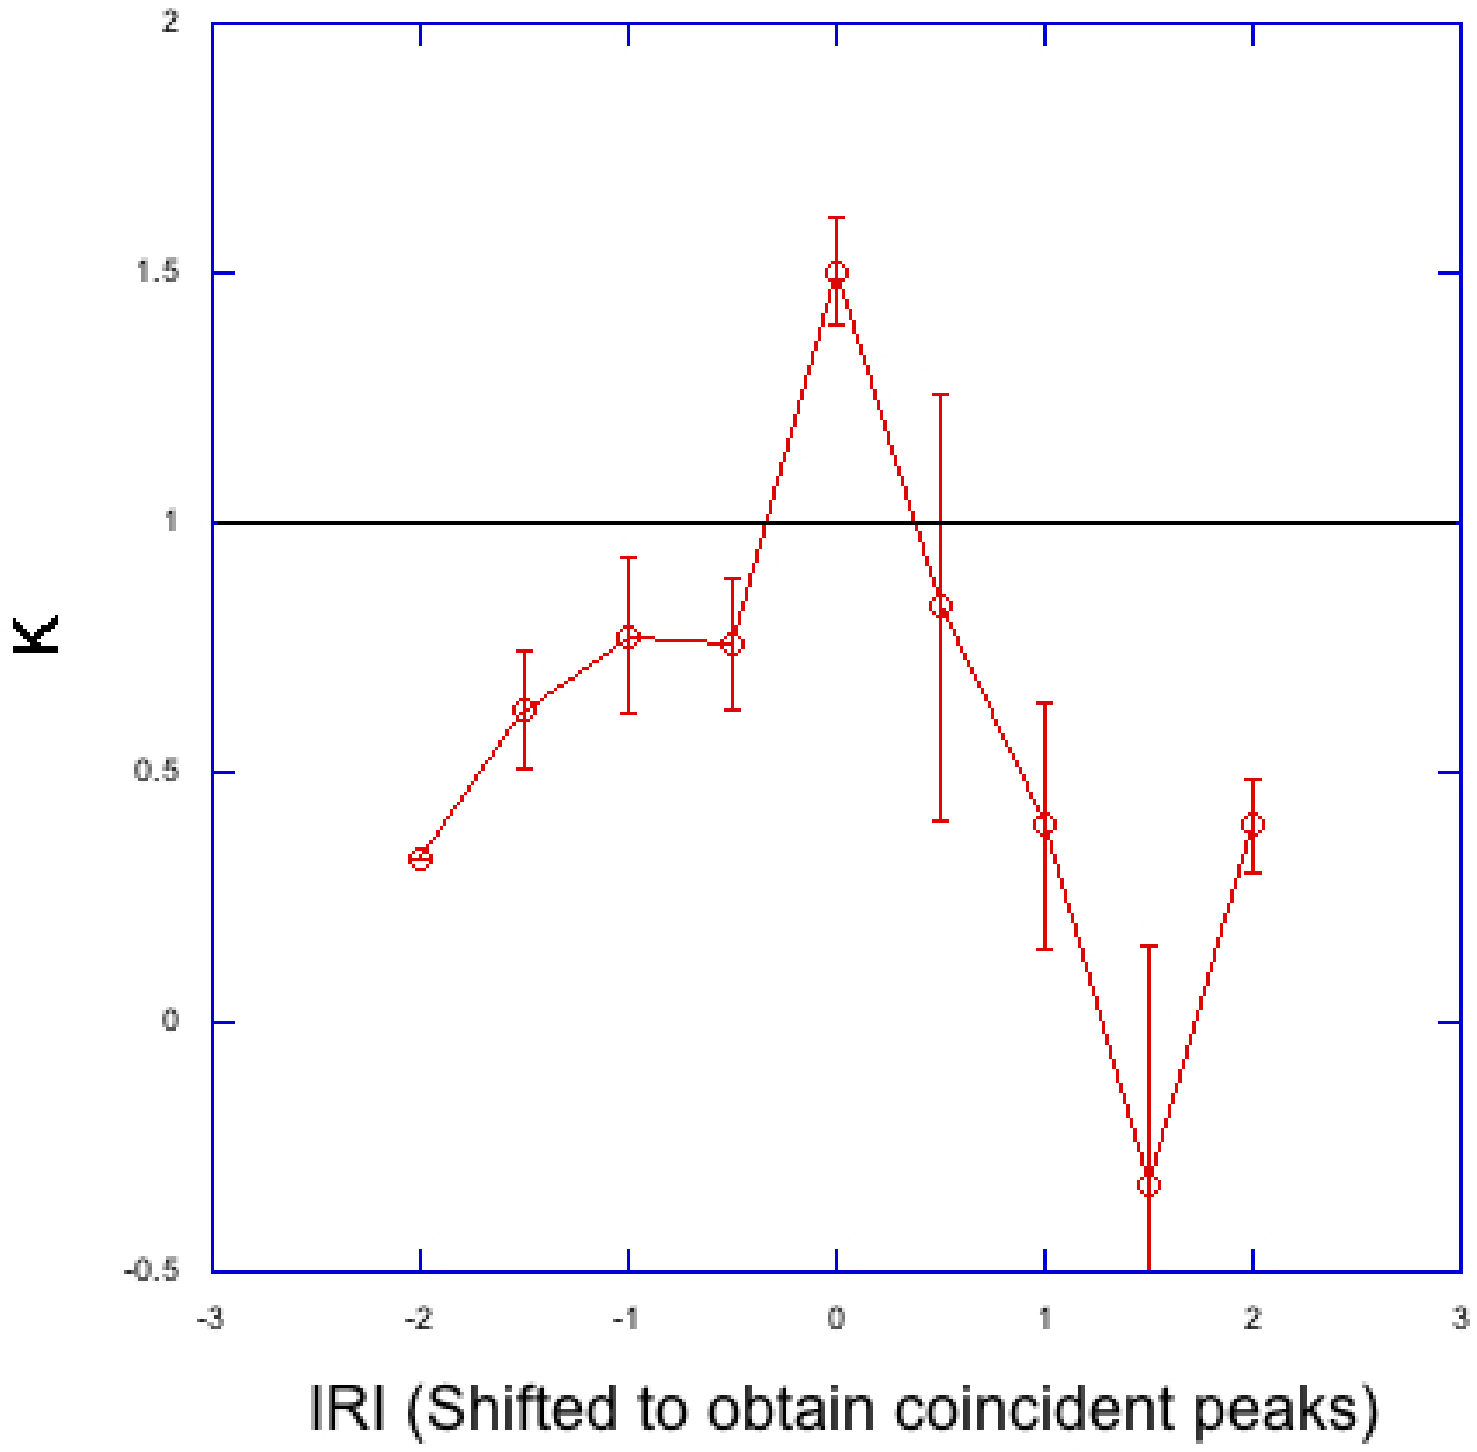

Figure 3. K values in correspondence of the six tested interstimulus intervals. These values have been obtained by pooling data from each observer into a unique meta-observer. The data are also pooled around the peak time, here denoted as $t = 0$. The error bar is the variance. LG violation is statistically significative at the peak. The horizontal straight line at $K = 1$ is the upper boundary imposed by LGI. c) Distributions τ_{LG} of the maxima of K (Fig. 1). τ_{LG} is peaked at 2 seconds and lasts about 1 second.

formulate a tentative hypothesis: since τ_{LG} corresponds to the maximal perturbation that a word exerts on a later word (maximal deviation from NIM), then the human linguistic processing is organized so that τ_{LG} is the most appropriate coupling time between two successive groups of words. A time window of about 1 sec surrounds τ_{LG}; it represents the interval over which LGI is violated. Our cognitive abilities seem geared in such a way that in that interval NIM is suspended and two adjacent groups of words within that window interact in a non-Bayesian way [14]. Away from that window, that is, for shorter and longer separations of word groups, a classical Bayesian strategy [11, 12] applies. This holds for any linguistic endeavor. Figs 5a) and b) offer two examples of statistical distribution of pauses in the word or note flow. In both cases, the statistics have a maximum around 3 sec. We hypothesize that, in order to make sense of a text,

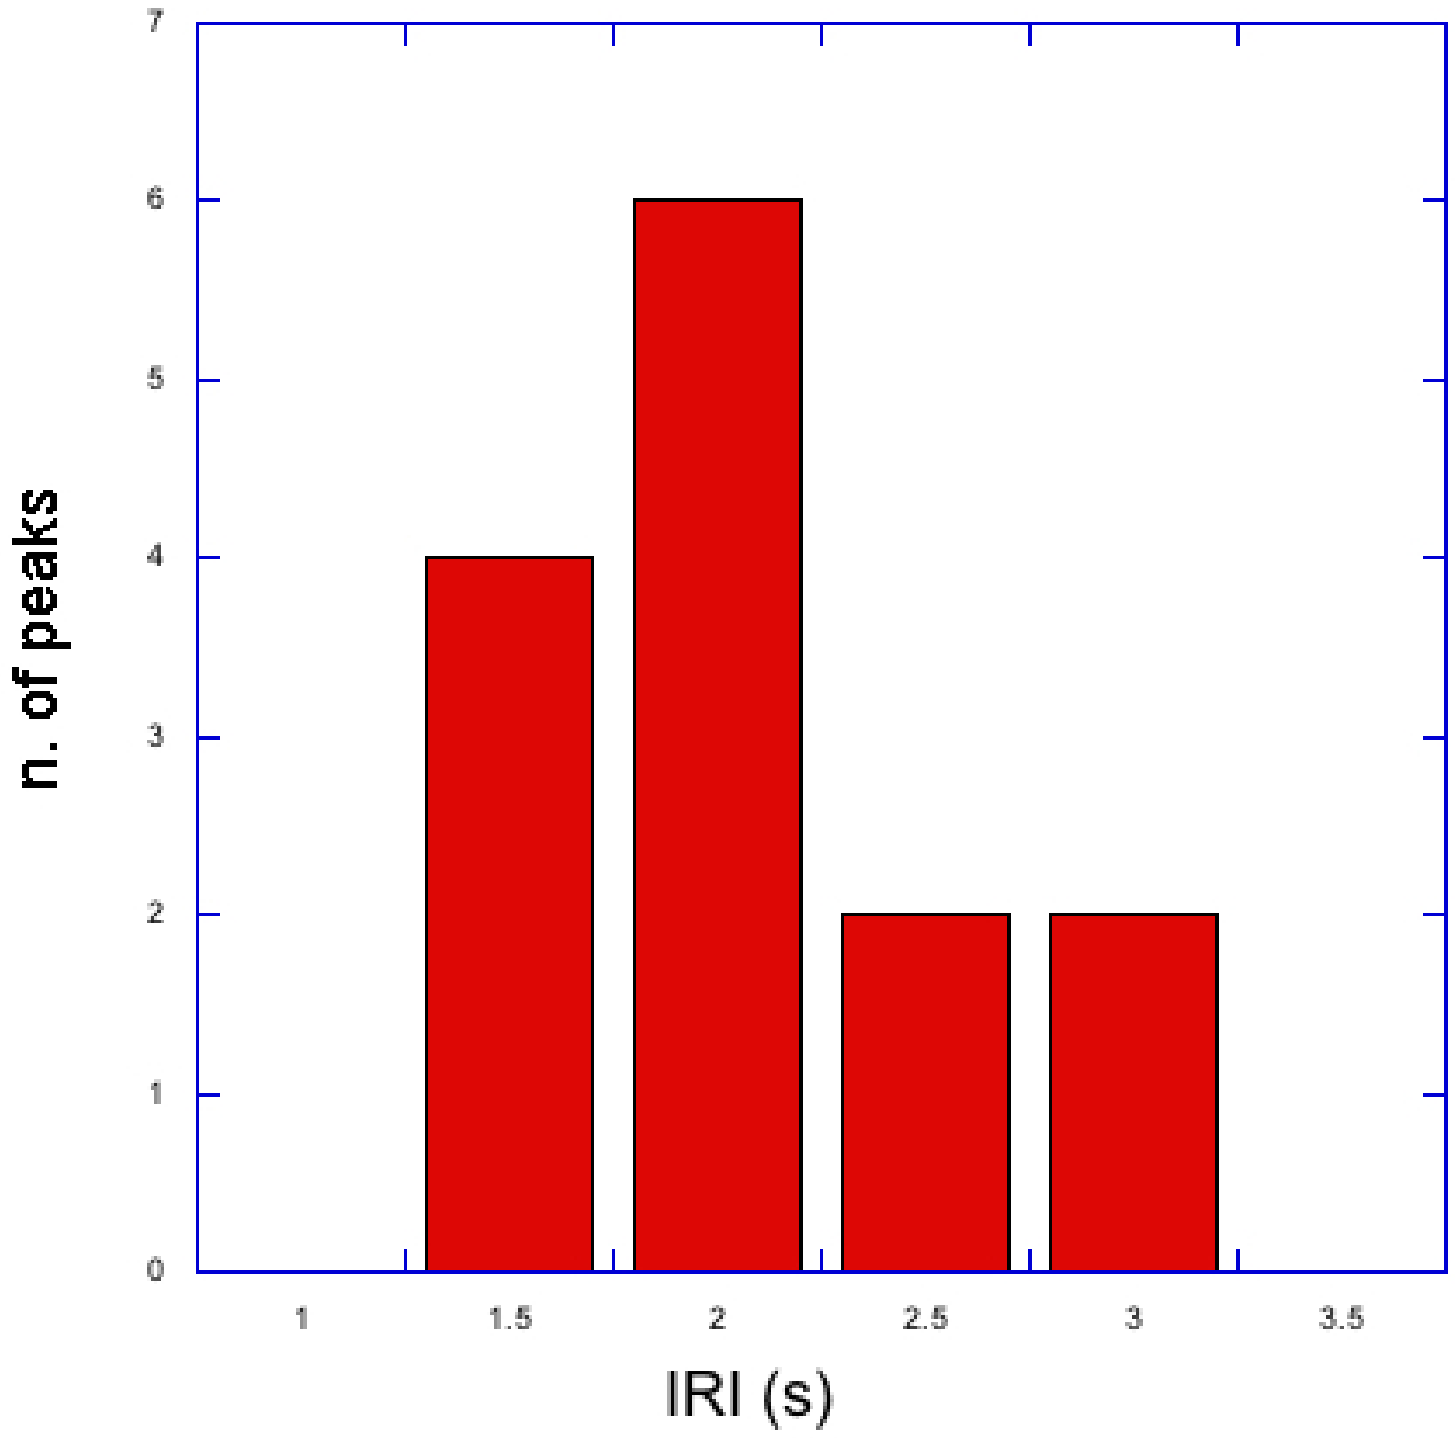

Figure 4. Distributions τ_{LG} of the maxima of K (Fig.1). τ_{LG} is peaked at 2 seconds.

two successive verses of a poem or measures of a symphony must be separated by a time of the order of τ_{LG}. We extend this hypothesis to figurative art and claim that we expect that appreciation of a painting or sculpture requires a grouping of the whole texture into small lumps visited separately by a discrete sequence of eye fixations, with a time separation τ_{LG} between successive ones. That the appreciation of a whole picture is not instantaneous but composed of discrete successive steps is known since 1971[27]. However, no timing meter was available at that time. More recent investigations on painting displays have isolated specific cases in which the time separations of successive fixations of a scanpath are around 4 sec. [28].

The individual lumps (word groups in a literary text, note groups in a musical text, small areas in a figurative text) generate timeless perceptions by themselves and the time separations from one to the next are the relevant ones in the LGI test here discussed.

It remains to explain why τ_{LG} in the above mentioned semantic tasks is close, but consistently larger, than that reported in our tests. We put forward the following tentative explanation. LGI violation is a strategy to correlate successive linguistic

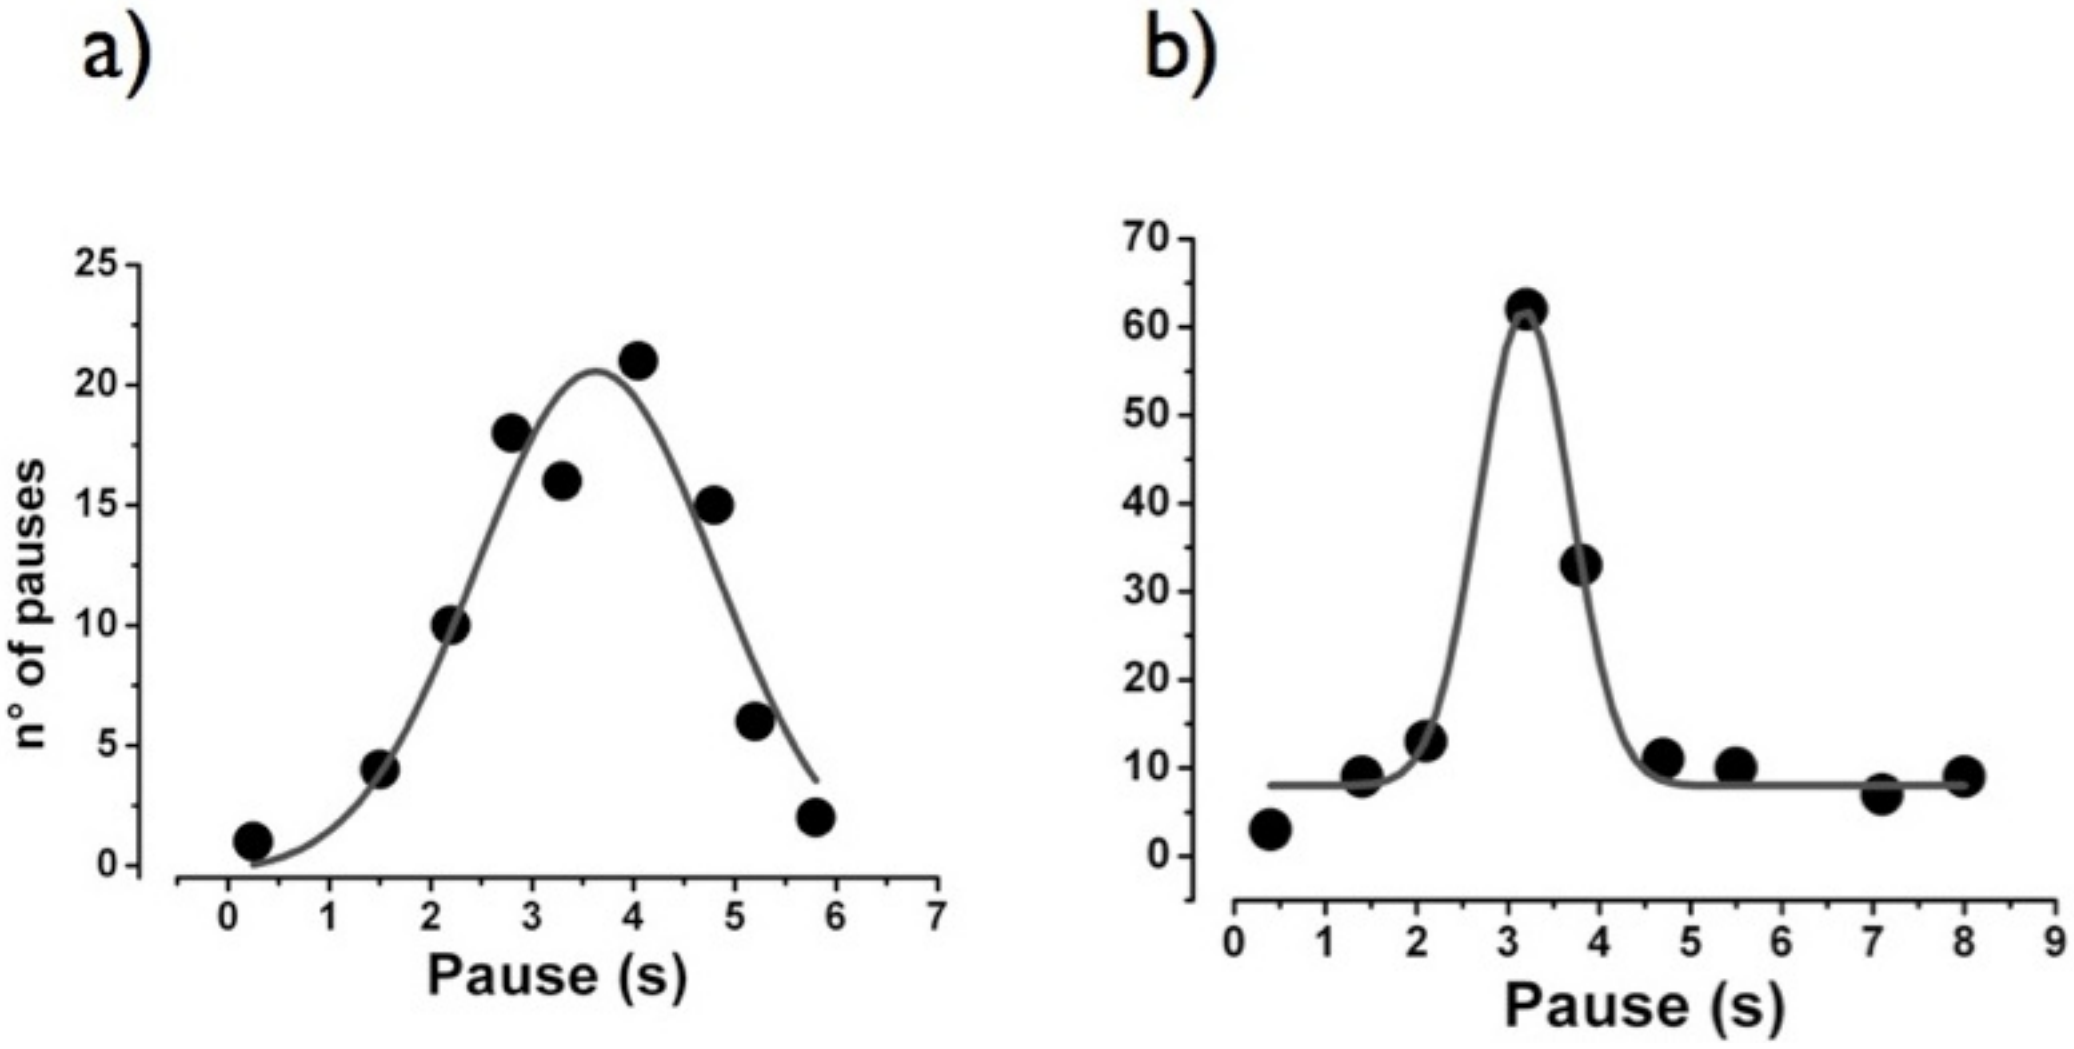

Figure 5. a) Time distribution of pauses in a poetical text (Dantes Comedy, Canto XXXIII of Inferno, played by the speaker Roberto Benigni); b) Time distribution of pauses in a musical text (intervals in the first movement of Beethovens Fifth Symphony, interpreted by the Symphonieorchester des Bayerischen Rundfunks directed by Leonard Bernstein). The gray lines are Gaussian fits of the data points of a single subject. It results: a) mean=3.63 sec; standard deviation=1.15 sec; b) mean=3.18 sec; standard deviation=0.5 sec. No appreciable differences of means and standard deviations occur for different listeners

lumps one another, overcoming (or, better to say, re-adjusting) the emotional arousal that each piece provokes by itself. Our cognitive abilities seem to be geared for two different tasks, namely, i) within the single lump, make the best use of the incoming sensorial information (*apprehension*) and ii) combine the current apprehension with the correlation to the apprehension of a previous lump of some linguistic sequence (*judgment*). The two tasks may interact with different weights depending on the semantic content of the sequence we are exposed to. Task ii) corresponds to an invasive measurement, hence it implies violation of LGI. The τ_{LG} measured by us in a sequence with no semantic content provides the first experimental evidence of mechanism ii).

After these qualitative considerations, we develop a quantitative approach that leads to considering τ_{LG} as the decoherence time of a quantum process.

From a neuroscientific point of view, the achievement of a concordance between two successive pieces of a linguistic text amounts to stating that the working memory has selected an interpretation of the previous piece whose neural code (i.e. temporal spike sequence) is adequately synchronized with the second piece. It follows that a linguistic interpretation is just the most appropriate selection of the meaning of the first piece in order to fit the second one. We hypothesize that the exploration of the different meanings (i.e. spike sequences) stored in the working memory is speeded-up by a quantum mechanism.

The quantum features associated with neural synchronization dynamics have been explored in the past years [29, 30, 31, 32]; the main results are reported here. Taking into account that each spike lasts about 1 ms, that the minimal interspike separation is 3 ms, and that the decision time can be estimated as $T \approx 200ms$, we can split T into $200/3 \approx 66$ bins of 3 ms duration, which are designated by 1 or 0 depending on whether they have a spike or not. Thus the a priori total number of different messages which can be transmitted is

$$M = 2^{66} \approx 6 \times 10^{19}.$$

However, we must account also for the average rate at which spikes are processed in our cortex brain, (so called γ band centered at 40 Hz, average interspike interval of 25 ms). When we account for this rate we can evaluate a reduction factor 0.54 in the bin number [33], thus there are roughly 10^{11} words with significant probability.

Suppose now that we expose the cognitive agent to fast changing scenes, by presenting in sequence frames with a time separation less than 200 ms. While small gradual changes induce the sense of motion as in movies, big differences imply completely different subsequent spike trains. As a result, any spike train gets interrupted after a duration ΔT less than the canonical T.

Whenever we stop the single perceptual task at a time ΔT shorter than the total time T, then the bin stretch $T - \Delta T$ is not explored. This means that all stimuli which provide equal spike sequences up to ΔT and differ afterwards will cover an uncertainty region ΔM. Setting up an uncertainty relation beween the two complementary variables ΔM and ΔT

$$\Delta M \cdot \Delta T = C$$

It results [30] C = 620 words x bins. In order to convert C into joules x seconds as Planck constant, consider that : (i) 1 bin=3ms; (ii) the minimal perturbation to a word is one spike, that requires the energy corresponding to about 10^7 transitions $ATP \rightarrow ADP + P$ [34] each one taking 0.3 eV; thus we obtain

$$C = 620\ words \cdot bins = 10^{-12} Js = 10^{22}\hbar$$

Let us apply these numbers to the evaluation of the decoherence time. Considering a disturbance given by the Boltzmann factor at room temperature kBT= 25.6 meV, a time $t = 10^{-14}$ s is enough to overtake the Planck constant and cancel quantum effects [35]. However two main corrections should be made to the above reasoning, namely: i) the quantum of action is $C = 10^{-12} J \cdot s$;ii) the elementary disturbance has energy $0.3 \times 10^7 eV = 3 \times 10^{-13} J$. The resulting decoherence time happens to be 3 sec, just as τ_{LG}.

Thus we have learned some new facts,namely: i) the elementary disturbance in the brain code has energy $3 \times 10^{-13} J$, that is, about 10^8 times $k_B T$; the decoherence time is 10^{14} times that predicted by nave arguments , applicable to free particles but certainly not to a spiking network that works by synchronization.

We conclude with some comments on related approach. An experimental investigation by Conte et al[36] displays evidence of quantum interference when two ambiguous figures are presented with a time separation of 800 msec.. However, it says nothing for longer times, leaving open the question whether the quantum effect lasts for ever or is confined within a time window, which is in fact the main novelty of our presentation. A purely qualitative approach to LGI violation [37] makes no reference whatsoever to realistic times slots where the effect should occur.

The search for quantum effects in human cognitive processes was so far based on plausibility arguments. According to Refs.[19, 20, 21], use of the quantum formalism is necessary to explain many transient cognitive endeavors. Our report provides the laboratory evidence of a time window within which classical physics fails and a quantum description is a possible way to explain cognitive correlations therein. This has nothing to do with microscopic physical effects, as naively claimed in some popular accounts of cognitive phenomena.

4. Materials and Methods

The stimulus presented to the observers was the Necker cube (Fig.1a) whereby the perceived perspective of the front face of the cube alternates between two different options as either facing upward and to the right or downward and to the left. These two percepts alternate in time. All visual stimuli were displayed by a 21inc. color CRT monitor (Sony GDM-F500 800*600 pixels, refresh rate 100 Hz) and generated by a Personal Computer. The experiment was written using the Psychophysics Toolbox 2.54 extensions [38, 39, 40]. The Necker cube was defined by black lines (0.12 thickness) and covered an area of $5° \cdot 5°$. Observers watched binocularly the display at a viewing distance of 57 cm. The stimulus was displayed at the center of the screen on a mid gray background with luminance of $25cd/m^2$. No fixation point was presented, as observers were asked to passively inspect the stimulus on the screen, with natural eye movements. Subjects viewed for 120 times (N) per condition a sequence of three Necker cubes at three different times (t_1, t_2, t_3). Each presentation of the cube had a duration of 0.3 seconds and was separated from the next presentation by a variable interstimulus interval (ISI) with the condition that $t_2 - t_1 = t_3 - t_2$. Each sequence was followed by a blank interval (no stimulus displayed) of 5 seconds, well above the maximal ISI. For two of the three stimuli of the sequence, an acoustic beep was presented to the subjects (Fig. 1b), signaling that they were asked to report as quickly as possible which of the two different percept they had for the present stimulus, pressing “p” on the keyboard if they perceived a cube with an upward-right front face or “z” if they perceived a downward-left front face. All the fourteen subjects were students of the University of Firenze, with normal or corrected to normal vision, nave of the aim of the study. Each subject gave a written informed consent to participate, and the experiment was done according to the declaration of Helsinki. The ethics committee of the National Institute of Optics specifically approved this study. Incidentally, fourteen subject could appear a small munber, but in visual psychophysics some important effects were shown using only two subjects (e.g.[41]) also the CIE standard observers (used to calculate the efficiency of lamps) are averages based on experiments with small numbers (around 15-20) of people[42]. The mean switching time, related to C_{12}, has been previously measured [43, 44]. As for the single time correlation C_{12}, a deviation from a purely classical statistics, called Quantum Zeno effect, has been reported [45]. It refers to time scales below 1 sec, well within the perception regime. Nobody to our knowledge has ever tested LGI violations, that is, quantum effects on the time scale corresponding to the interplay between different successive perceptions, as done in this report.

References

[1] J.S. Bell. On the einstein-podolsky-rosen paradox. *Physics*, 1(3):195–200, 1964.

[2] A.J. Leggett and A. Garg. Quantum mechanics versus macroscopic realism: Is the flux there when nobody looks? *Physical Review Letters*, 54(9):857–860, 1985.

[3] M.E. Goggin, M.P. Almeida, M. Barbieri, B.P. Lanyon, J.L. OBrien, A.G. White, and G.J. Pryde. Violation of the leggett–garg inequality with weak measurements of photons. *Proceedings of the National Academy of Sciences*, 108(4):1256–1261, 2011.

[4] J. Dressel, CJ Broadbent, JC Howell, and AN Jordan. Experimental violation of two-party leggett-garg inequalities with semiweak measurements. *Physical review letters*, 106(4):40402, 2011.

[5] J.S. Xu, C.F. Li, X.B. Zou, and G.C. Guo. Experimental violation of the leggett-garg inequality under decoherence. *Scientific reports*, 1, 2011.

[6] C. Koch. *The quest for consciousness: A neuroscientific approach.* Roberts & Co, 2004.

[7] S. Dehaene, C. Sergent, and J.P. Changeux. A neuronal network model linking subjective reports and objective physiological data during conscious perception. *Proceedings of the National Academy of Sciences*, 100(14):8520–8525, 2003.

[8] J.P. Lachaux, E. Rodriguez, J. Martinerie, F.J. Varela, et al. Measuring phase synchrony in brain signals. *Human brain mapping*, 8(4):194–208, 1999.

[9] L. Melloni, C. Molina, M. Pena, D. Torres, W. Singer, and E. Rodriguez. Synchronization of neural activity across cortical areas correlates with conscious perception. *The Journal of Neuroscience*, 27(11):2858–2865, 2007.

[10] P. Fries. Neuronal gamma-band synchronization as a fundamental process in cortical computation. *Annual review of neuroscience*, 32:209–224, 2009.

[11] T.L. Griffiths, C. Kemp, and J.B. Tenenbaum. *Bayesian models of cognition*, volume Cambridge handbook of computational cognitive modeling, pages 59–100. Cambridge Univ Press, 2008.

[12] K.P. Körding and D.M. Wolpert. Bayesian decision theory in sensorimotor control. *Trends in cognitive sciences*, 2006.

[13] FT Arecchi. Dynamics of consciousness: Complexity and creativity. *Journal of Psychophysiology*, 24(2):141, 2010.

[14] F.T. Arecchi. Phenomenology of consciousness: from apprehension to judgment. *Nonlinear Dynamics, Psychology and Life Sciences*, 15:359–375, 2011.

[15] E. Pöppel. A hierarchical model of temporal perception. *Trends in cognitive sciences*, 1(2):56–61, 1997.

[16] E. Pöppel. Consciousness versus states of being conscious. *Behavioral and Brain Sciences*, 20(01):155–156, 1997.

[17] E. Poppel. Lost in time: a historical frame, elementary processing units and the 3-second window. *Acta Neurobiologiae Experimentalis*, 64(3):295–302, 2004.

[18] E. Pöppel. Pre-semantically defined temporal windows for cognitive processing. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 364(1525):1887–1896, 2009.

[19] D. Aerts, M. Czachor, and B. DHooghe. Towards a quantum evolutionary scheme: violating bells

inequalities in language. *Evolutionary Epistemology, Language and Culture*, pages 453–478, 2006.

[20] D. Aerts, J. Broekaert, and L. Gabora. A case for applying an abstracted quantum formalism to cognition. *New Ideas in Psychology*, 29(2):136–146, 2011.

[21] J.S. Trueblood and J.R. Busemeyer. A quantum probability account of order effects in inference. *Cognitive science*, 35(8):1518–1552, 2011.

[22] L.A. Necker. Observations on some remarkable optical phenomena seen in switzerland and on an optical phenomenon which occurs on viewing a figure of a crystal or geometrical solid. *The London and Edinburgh Philosophical Magazine and Journal of Science*, 1(5):329–337, 1832.

[23] R. Arrighi, F.T. Arecchi, A. Farini, and C. Gheri. Cueing the interpretation of a necker cube: a way to inspect fundamental cognitive processes. *Cognitive Processing*, 10(Suppl. 1):S95–S99, Feb 2009.

[24] David A Leopold, Melanie Wilke, Alexander Maier, and Nikos K Logothetis. Stable perception of visually ambiguous patterns. *Nat Neurosci*, 5(6):605–9, Jun 2002.

[25] B. Dainton. Temporal consciousness. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy.* Fall 2010 edition, 2010.

[26] R. Le Poidevin. The experience and perception of time. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy.* Fall 2011 edition, 2011.

[27] D. Noton and L. Stark. Scanpaths in eye movements during pattern perception. *Science*, 171:308–311, 1971.

[28] CM Privitera, LW Stark, and WH Zangemeister. Bonnards representation of the perception of substance. *Journal of Eye Movement Research*, 1(1):1–6, 2007.

[29] F.T. Arecchi. Chaotic neuron dynamics, synchronization, and feature binding: quantum aspects. *Mind and Matter*, 1(1):15–43, 2003.

[30] F.T. Arecchi. Chaotic neuron dynamics, synchronization and feature binding. *Physica A: Statistical Mechanics and its Applications*, 338(1):218–237, 2004.

[31] F.T. Arecchi. Neuron dynamics and chaotic synchronization. *Fluctuation and Noise Letters*, 5(02):163–173, 2005.

[32] F.T. Arecchi. Feature binding as neuron synchronization: quantum aspects. *Brazilian journal of physics*, 35(2A):253–259, 2005.

[33] S.P. Strong, R. Koberle, R.R. de Ruyter van Steveninck, and W. Bialek. Entropy and information in neural spike trains. *Physical Review Letters*, 80(1):197–200, 1998.

[34] S.B. Laughlin, R.R.R. van Steveninck, and J.C. Anderson. The metabolic cost of neural information. *Nature neuroscience*, 1(1):36–41, 1998.

[35] M. Tegmark. Importance of quantum decoherence in brain processes. *Physical Review E*, 61(4):4194, 2000.

[36] E. Conte, A.Y. Khrennikov, O. Todarello, A. Federici, L. Mendolicchio, and J.P. Zbilut. Mental states follow quantum mechanics during perception and cognition of ambiguous figures. *Open Systems & Information Dynamics*, 16(01):85–100, 2009.

[37] T. Filk. Non-classical correlations in bistable perception? *Axiomathes*, 21(2):221–232, 2011.

[38] D.H. Brainard. The psychophysics toolbox. *Spatial vision*, 10(4):433–436, 1997.

[39] D.G. Pelli. The videotoolbox software for visual psychophysics: Transforming numbers into movies. *Spatial vision*, 10(4):437–442, 1997.

[40] M. Kleiner, D. Brainard, D. Pelli, A. Ingling, R. Murray, and C. Broussard. Whats new in psychtoolbox-3. *Perception*, 36(14):1–1, 2007.

[41] P. Neri, M.C. Morrone, and D.C. Burr. Seeing biological motion. *Nature*, 395:894–895, 1998.

[42] G. Wyszecki and W.S. Stiles. *Color science.* John Wiley & Sons, New York, 1982.

[43] A. Borsellino, A. Marco, A. Allazetta, S. Rinesi, and B. Bartolini. Reversal time distribution in the perception of visual ambiguous stimuli. *Biological Cybernetics*, 10(3):139–144, 1972.

[44] D.A. Leopold and N.K. Logothetis. Multistable phenomena: changing views in perception. *Trends in cognitive sciences*, 3(7):254–264, 1999.

[45] H. Atmanspacher, T. Filk, and H. Römer. Quantum zeno features of bistable perception. *Biological Cybernetics*, 90(1):33–40, 2004.